




GrooVical

Precise Grooving & Turning Applications

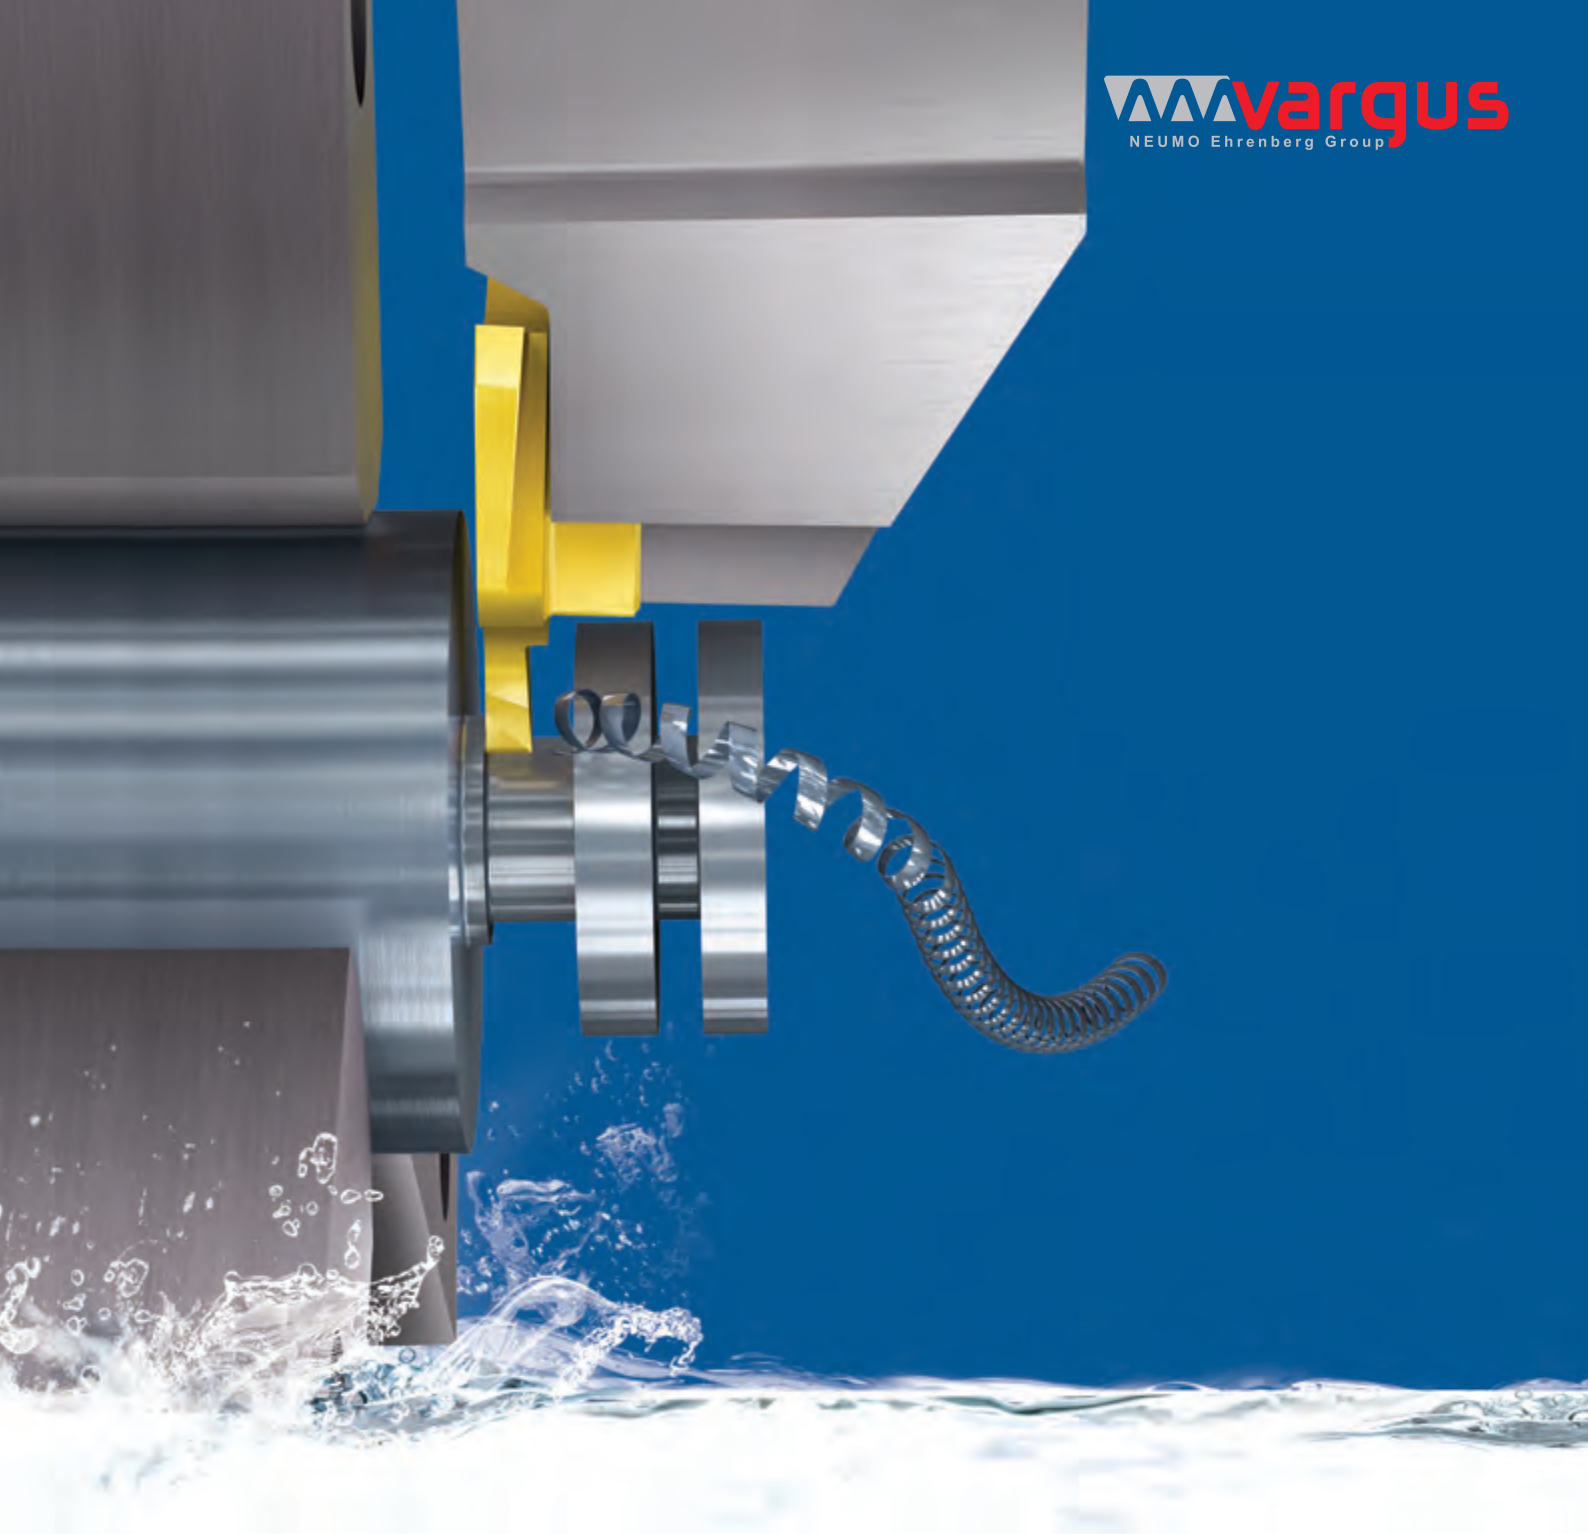

METRIC

GROOVEX

Innovative Grooving & Turning Solutions

GrooVical

Precise Grooving & Turning Applications New Range of Indexable Grooving Inserts



The Groovical family of products by Groovex offers improved solutions for internal and external grooving and turning applications. GVN26 and GV29 feature inserts with three cutting corners and a unique rigid clamping system for improved productivity.

The new GVN style inserts offer new applications in the Groovical line, including Turning and Grooving chip former to form helical chips, new parting off tools, machining close to shoulders and LH toolholders.

GVN26

t_{max} = Groove
Depths up to 5.5mm

W = Groove Widths
from 0.5-2.5mm

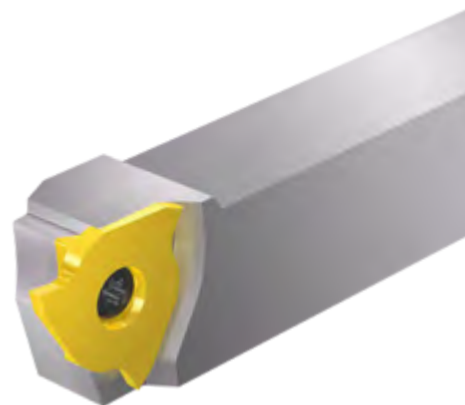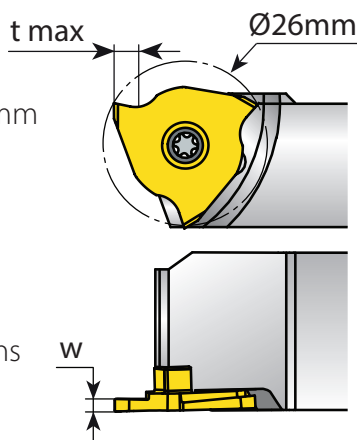


GVN29

t_{max} = Groove
Depths up to 6.5mm

**Additional
Corner Support**

W = Groove Widths
from 2-6.35mm

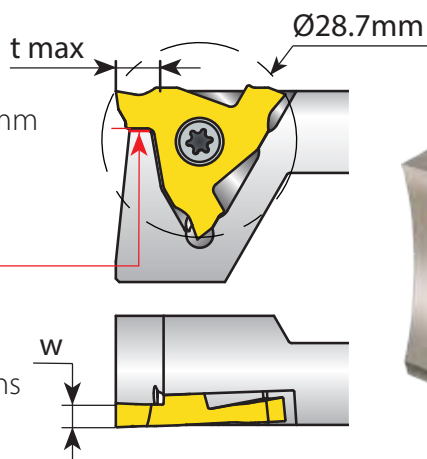

GrooVical Catalog

■ Groovical Ordering Code System	Page 3
INSERTS	
■ Close to Shoulder Square Grooving & Turning Chip Former	Page 4
■ Close to Shoulder Square Grooving	Page 5
■ Close to Shoulder Round Grooving	Page 6
■ Close to Shoulder Parting Off	Page 7
■ Square Grooving (GV29)	Page 8
■ Round Grooving (GV29)	Page 8
TOOLHOLDERS	
■ Close to Shoulder External Toolholders	Page 9
■ Close to Shoulder External Toolholders 90°	Page 10
■ Close to Shoulder Internal Toolholders	Page 11
■ External Toolholders (GV29)	Page 12
■ External Toolholders 90° (GV29)	Page 13
■ Internal Toolholders (GV29)	Page 13
■ D max Limitations	Page 14
TECHNICAL DATA	
■ Recommended Cutting Data	Page 15

GrooVical Ordering Code System

Groovical Inserts


GVN	26	R	P	0.5	-	0.05	-	15	R	VKX
1	2	3	4	5		6		7	8	9
1- Insert Type			2 - Circular Circumference		3 - RH or LH		4 - Type of Application		5 - Grooving Width	
GV - Groovical Neutral GVN - Groovical Close to Shoulder			26 - 26mm 29 - 28.7mm		R - RH L - LH N - RH/LH		T - Turning & Grooving S - Square Grooving R - Round Grooving P - Parting Off X - Special Profile		0.5 to 6.35mm	
7 - Approach Angle			8 - Cutting Side		9 - Carbide Grade		6 - Corner Radius			
6 - 6 Deg. 15 - 15 Deg.			R - Right corner leading L - Left corner leading None - Neutral		VTX, VKX		0.0 - 1mm			

Groovical Toolholders

GVN	E	R	20	-	29	-	1	
1	2	3	4		5		6	
1- Insert Type		2 - External / Internal		3 - RH or LH		4 - Shank Size	5 - Insert Size	6 - For Insert Width
GV - Groovical Neutral GVN - Groovical Close to Shoulder		E - External E90 - External 90° I - Internal		R - RH L - LH		10, 12, 16, 20, 25, 32, 40 mm	26 29	1 - 2.5 - 3.5mm 2 - 3.6 - 5.5mm

Close to Shoulder Square Grooving & Turning Chip Former

NEW

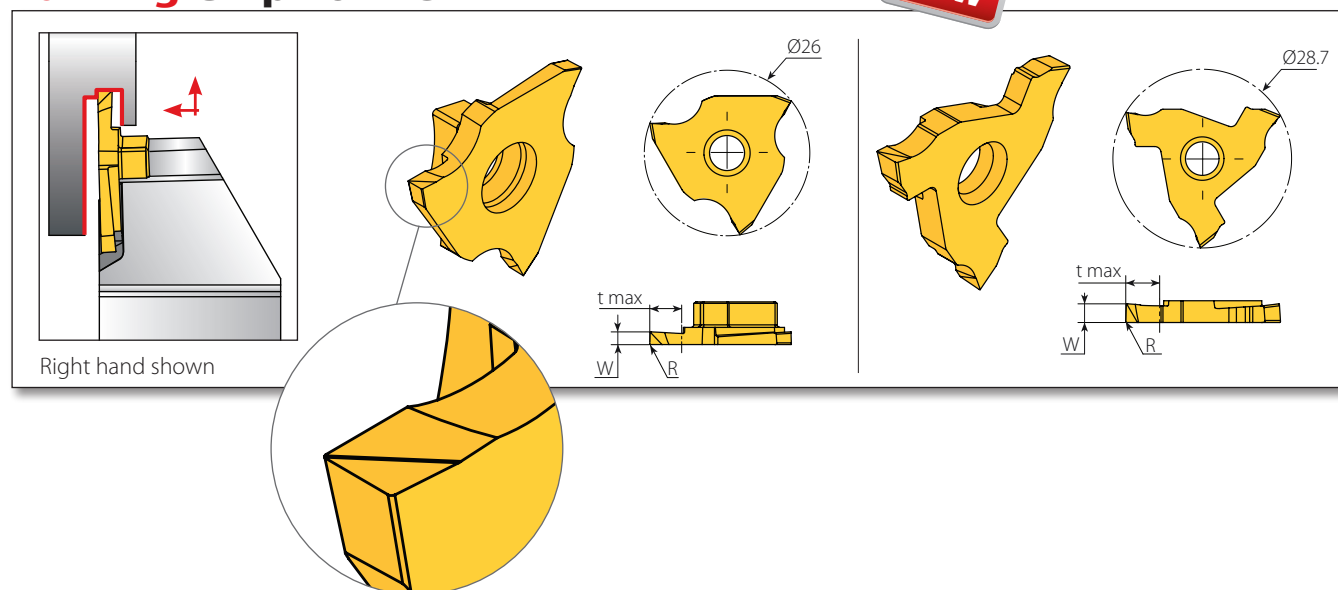


Insert Size	Ordering Code	Dimensions mm			Grade		Toolholder
IC	RH/LH	W±0.02	R±0.03	t max	VKX	VTX	
26	GVN26R/LT1.0-008	1.0	0.08	3.0	◦	•	GVNE...-26, GVNE90...-26
	GVN26R/LT1.5-0.08	1.5	0.08	4.0	◦	•	
	GVN26R/LT2.0-0.1	2.0	0.10	5.0	◦	•	
	GVN26R/LT2.5-0.15	2.5	0.15	5.0	◦	•	
29	GVN29R/LT3.0-0.2	3.0	0.2	6.5	◦	•	GVNE...-29-1, GVNE90...-29-1, GVNI...-29

- In stock
- Available upon request


Close to shoulder machining

Turning and Grooving positive Chip Former, preventing tangled chips around the workpiece

Grooving up to 6.5mm depth

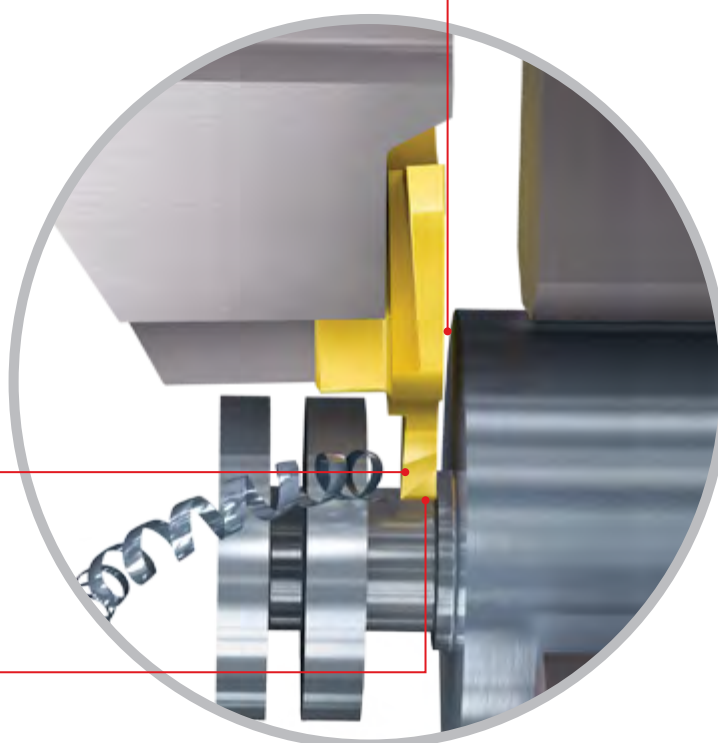


Close to Shoulder Square Grooving

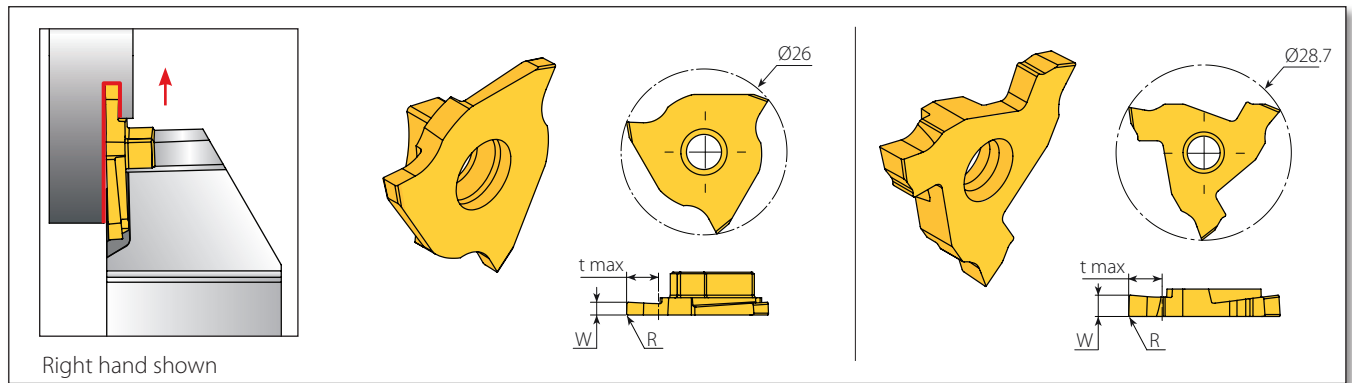

Insert Size	Ordering Code	Dimensions mm			Grade		Toolholder
IC	RH/LH	W±0.02	R±0.03	t max	VKX	VTX	
26	GVN26R/LS0.57-00	0.57	0.00	1.0	●	○	GVNE...-26, GVNE90...-26
	GVN26R/LS0.79-00	0.79	0.00	1.6	●	○	
	GVN26R/LS0.79-0.2	0.79	0.20	1.6	●	○	
	GVN26R/LS0.87-00	0.87	0.00	2.0	●	○	
	GVN26R/LS0.97-00	0.97	0.00	2.0	●	○	
	GVN26R/LS1.0-0.1	1.00	0.10	2.0	●	○	
	GVN26R/LS1.07-00	1.07	0.00	2.0	●	○	
	GVN26R/LS1.2-00	1.20	0.00	2.0	●	○	
	GVN26R/LS1.24-00	1.24	0.00	2.0	●	○	
	GVN26R/LS1.4-00	1.40	0.00	2.0	●	○	
	GVN26R/LS1.44-00	1.44	0.00	2.0	●	○	
	GVN26R/LS1.5-0.1	1.50	0.10	3.0	●	○	
	GVN26R/LS1.5-0.2	1.50	0.20	5.0	●	○	
	GVN26R/LS1.58-0.2	1.58	0.20	3.0	●	○	
	GVN26R/LS1.6-00	1.60	0.00	3.0	●	○	
	GVN26R/LS1.7-0.1	1.70	0.10	3.0	●	○	
	GVN26R/LS1.74-00	1.74	0.00	3.0	●	○	
	GVN26R/LS2.0-00	2.00	0.00	3.0	●	○	
	GVN26R/LS2.0-0.1	2.00	0.10	3.0	●	○	
	GVN26R/LS2.0-0.2	2.00	0.20	5.0	●	○	
29	GVN26R/LS2.22-0.15	2.22	0.15	5.0	●	○	GVNE...-29-1, GVNE90...-29-1, GVNI...-29
	GVN26R/LS2.39-0.15	2.39	0.15	5.0	●	○	
	GVN26R/LS2.47-0.2	2.47	0.20	5.0	●	○	
	GVN29R/LS2.38-0.1	2.38	0.10	6.5	●	○	
	GVN29R/LS2.5-0.1	2.50	0.10	6.5	●	○	
	GVN29R/LS2.7-0.1	2.70	0.10	6.5	●	○	
	GVN29R/LS3.0-0.2	3.00	0.20	6.5	●	○	
	GVN29R/LS3.17-0.2	3.17	0.20	6.5	●	○	
29	GVN29R/LS3.5-0.2	3.50	0.20	6.5	●	●	GVNE...-29-2, GVNE90...-29-2, GVNI...-29
	GVN29R/LS4.0-0.4	4.00	0.40	6.5	●	●	
	GVN29R/LS5.0-0.4	5.00	0.40	6.5	●	●	

- In stock
- Available upon request

Close to Shoulder Round Grooving

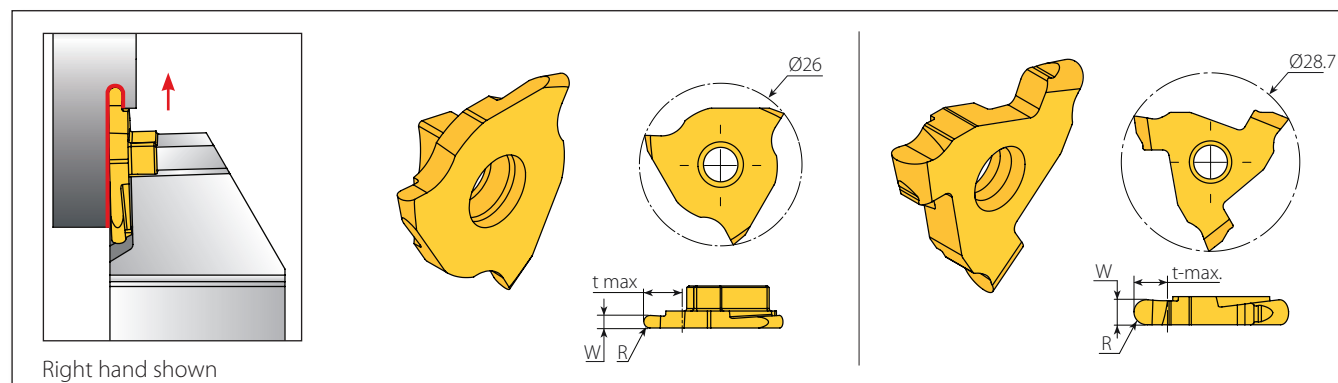


Insert Size	Ordering Code	Dimensions mm			Grade		Toolholder
IC	RH/LH	W±0.02	R±0.03	t max	VKX	VTX	
26	GVN26R/LR0.5-0.25	0.50	0.25	1.0	●	○	GVNE...-26, GVNE90...-26
	GVN26R/LR0.79-0.39	0.79	0.39	1.6	●	○	
	GVN26R/LR1.0-0.5	1.00	0.50	2.0	●	○	
	GVN26R/LR1.2-0.6	1.20	0.60	2.0	●	○	
	GVN26R/LR1.5-0.75	1.50	0.75	5.0	●	○	
	GVN26R/LR1.6-0.8	1.60	0.80	3.0	●	○	
	GVN26R/LR2.0-1.0	2.00	1.00	3.0	●	○	
29	GVN26R/LR2.39-1.19	2.39	1.19	5.0	●	○	GVNE...-29-1, GVNE90...-29-1, GVNI...-29
	GVN29R/LR2.38-1.19	2.38	1.19	6.5	●	○	
	GVN29R/LR2.5-1.25	2.50	1.25	6.5	●	○	
	GVN29R/LR3.0-1.5	3.00	1.50	6.5	●	○	
	GVN29R/LR3.17-1.59	3.17	1.59	6.5	●	○	
	GVN29R/LR4.0-2.0	4.00	2.00	6.5	●	●	GVNE...-29-2, GVNE90...-29-2, GVNI...-29

- In stock
- Available upon request




Close to Shoulder Parting Off

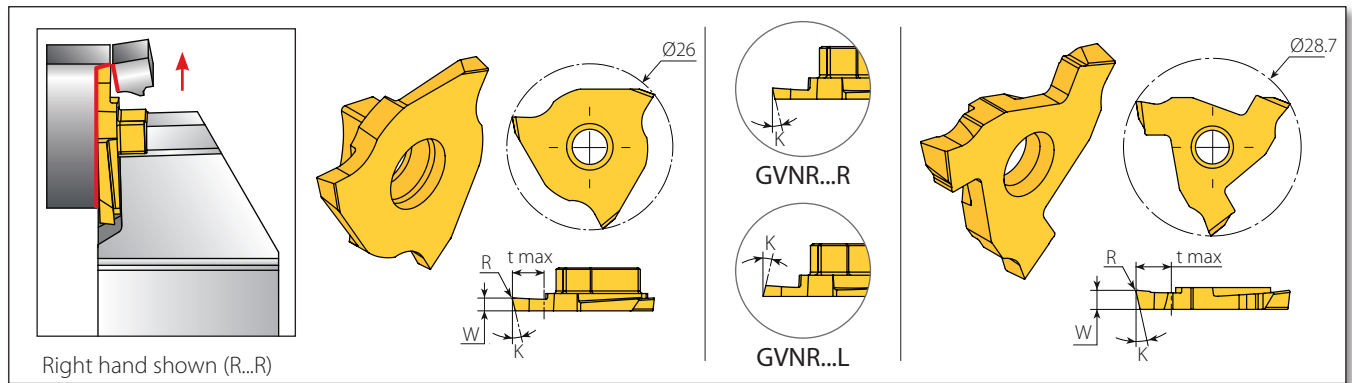

Insert Size	Ordering Code	Dimensions mm				Grade		Toolholder
IC	RH/LH	W±0.02	R±0.03	t max	K°	VKX	VTX	
26	GVN26RP0.5-0.05-06R	0.5	0.05	1.0	6	●	○	GVNE...-26, GVNE90...-26
	GVN26RP0.5-0.05-06L	0.5	0.05	1.0	6	○	○	
	GVN26LP0.5-0.05-06R	0.5	0.05	1.0	6	○	○	
	GVN26LP0.5-0.05-06L	0.5	0.05	1.0	6	●	○	
	GVN26RP0.5-0.05-15R	0.5	0.05	1.0	15	●	○	
	GVN26RP0.5-0.05-15L	0.5	0.05	1.0	15	●	○	
	GVN26LP0.5-0.05-15R	0.5	0.05	1.0	15	●	○	
	GVN26LP0.5-0.05-15L	0.5	0.05	1.0	15	●	○	
	GVN26RP1.4-0.05-06R	1.4	0.05	5.0	6	●	○	
	GVN26RP1.4-0.05-06L	1.4	0.05	5.0	6	○	○	
	GVN26LP1.4-0.05-06R	1.4	0.05	5.0	6	○	○	
	GVN26LP1.4-0.05-06L	1.4	0.05	5.0	6	●	○	
	GVN26RP1.4-0.05-15R	1.4	0.05	5.0	15	●	○	
	GVN26RP1.4-0.05-15L	1.4	0.05	5.0	15	●	○	
	GVN26LP1.4-0.05-15R	1.4	0.05	5.0	15	●	○	
	GVN26LP1.4-0.05-15L	1.4	0.05	5.0	15	●	○	
	GVN26RP2.0-0.1-06R	2.0	0.10	5.0	6	●	○	
	GVN26RP2.0-0.1-06L	2.0	0.10	5.0	6	○	○	
	GVN26LP2.0-0.1-06R	2.0	0.10	5.0	6	○	○	
	GVN26LP2.0-0.1-06L	2.0	0.10	5.0	6	●	○	
	GVN26RP2.0-0.1-15R	2.0	0.10	5.0	15	●	○	
	GVN26RP2.0-0.1-15L	2.0	0.10	5.0	15	●	○	
	GVN26LP2.0-0.1-15R	2.0	0.10	5.0	15	●	○	
	GVN26LP2.0-0.1-15L	2.0	0.10	5.0	15	●	○	
29	GVN29RP2.5-0.2-06R	2.5	0.20	6.5	6	●	●	GVNE...-29-1, GVNE90...-29-1, GVNI...-29
	GVN29RP2.5-0.2-06L	2.5	0.20	6.5	6	○	○	
	GVN29LP2.5-0.2-06R	2.5	0.20	6.5	6	○	○	
	GVN29LP2.5-0.2-06L	2.5	0.20	6.5	6	●	●	
	GVN29RP2.5-0.2-15R	2.5	0.20	6.5	15	●	●	
	GVN29RP2.5-0.2-15L	2.5	0.20	6.5	15	○	○	
	GVN29LP2.5-0.2-15R	2.5	0.20	6.5	15	○	○	
	GVN29LP2.5-0.2-15L	2.5	0.20	6.5	15	●	●	
	GVN29RP3.0-0.2-06R	3.0	0.20	6.5	6	●	●	
	GVN29RP3.0-0.2-06L	3.0	0.20	6.5	6	○	○	
	GVN29LP3.0-0.2-06R	3.0	0.20	6.5	6	○	○	
	GVN29LP3.0-0.2-06L	3.0	0.20	6.5	6	●	●	
	GVN29RP3.0-0.2-15R	3.0	0.20	6.5	15	●	●	
	GVN29RP3.0-0.2-15L	3.0	0.20	6.5	15	○	○	
	GVN29LP3.0-0.2-15R	3.0	0.20	6.5	15	○	○	
	GVN29LP3.0-0.2-15L	3.0	0.20	6.5	15	●	●	

- In stock
- Available upon request


Square Grooving (GV29)

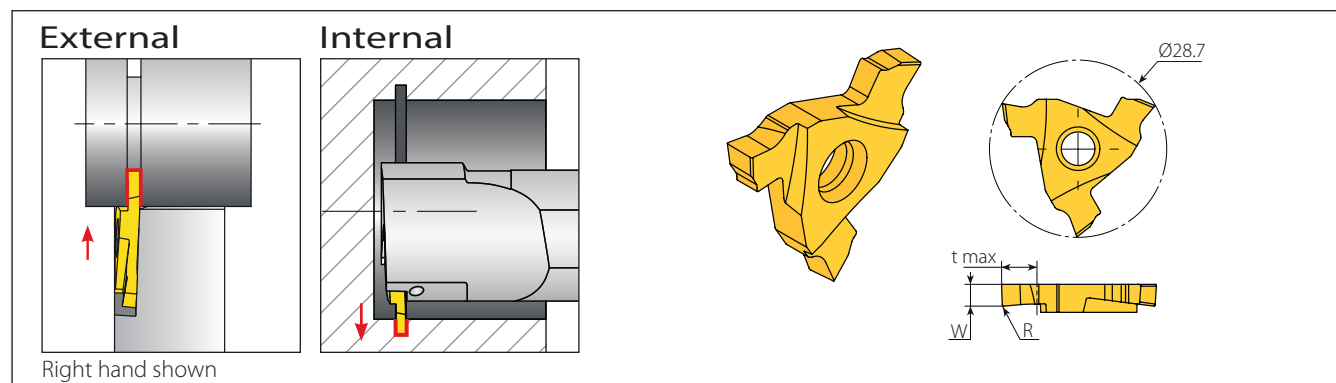

Insert Size	Ordering Code	Dimensions mm			Grade		Toolholder
IC	RH/LH	$W \pm 0.02$	$R \pm 0.03$	t_{max}	VKX	VTX	
29	GV29R/LS2.38-0.1	2.38	0.10	6.5	•	•	GVE...-29-1, GVE90...-2901, GVI...-29
	GV29R/LS2.5-0.1	2.50	0.10	6.5	•	•	
	GV29R/LS2.7-0.1	2.70	0.10	6.5	•	•	
	GV29R/LS3.0-0.2	3.00	0.20	6.5	•	•	
	GV29R/S3.0-0.4	3.00	0.40	6.5	•	•	GVE...-29-2, GVE90...-29-2, GVI...-29, GVNE...-29-2, GVNE90...-29-2, GVNI...-29
	GV29R/LS3.17-0.2	3.17	0.20	6.5	•	•	
	GV29R/LS3.5-0.2	3.50	0.20	6.5	•	•	
	GV29R/LS4.0-0.4	4.00	0.40	6.5	•	•	
	GV29R/LS5.0-0.4	5.00	0.40	6.5	•	•	


- In stock
- Available upon request

Round Grooving (GV29)

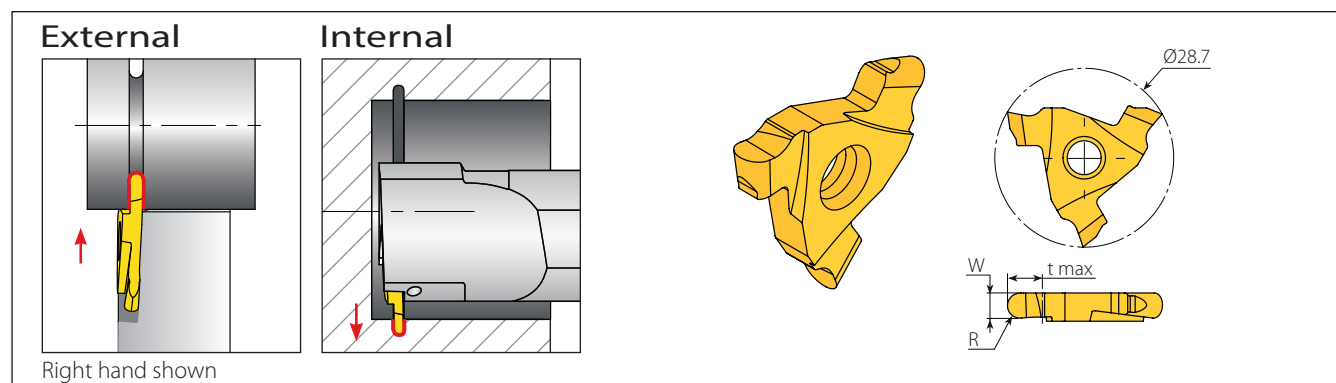


Insert Size	Ordering Code	Dimensions mm			Grade		Toolholder
IC	RH/LH	$W \pm 0.02$	$R \pm 0.03$	t_{max}	VKX	VTX	
29	GV29R/LR2.38-1.19	2.38	1.19	6.5	•	•	GVE...-29-1, GVE90...-2901, GVI...-29
	GV29R/LR2.5-1.25	2.50	1.25	6.5	•	•	
	GV29R/LR3.0-1.5	3.00	1.50	6.5	•	•	
	GV29R/LR3.17-1.59	3.17	1.59	6.5	•	•	
	GV29R/LR4.0-2.0	4.00	2.00	6.5	•	•	GVE...-29-2, GVE90...-29-2, GVI...-29, GVNE...-29-2, GVNE90...-29-2, GVNI...-29

- In stock
- Available upon request






Right hand shown



Close to Shoulder External Toolholders



GVN26

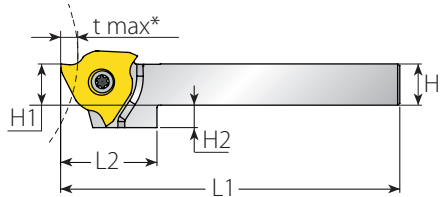


GVN29

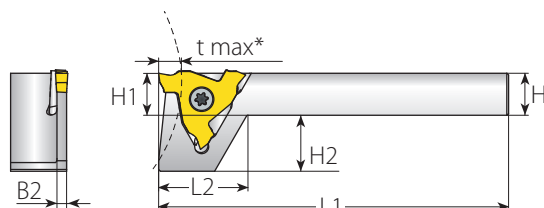


* See page 14 for t max and D max limitations.

										Spare Parts	
Insert Size	Ordering Code			Dimensions (mm)							
	RH/LH	H=B	L1	H1	L2	H2	F	B1	B2	Insert Screw	Torx Key
26	GVNER/L10-26	10	125	10	28.0	8.5	10.2	6.2	-	SGM5	L20IP
	GVNER/L12-26	12	125	12	28.0	6.5	12.2	4.2			
	GVNER/L16-26	16	125	16	28.0	2.5	16.2	-			
	GVNER/L20-26	20	125	20	28.0	-	20.2	-			
	GVNER/L25-26	25	150	25	28.0	-	25.2	-			
29	GVNER/L12-29-1	12	100	12	25.5	16	12.5	4	1.75		
	GVNER/L12-29-2	12	100	12	25.5	16	12.5	4	2.75		
	GVNER/L16-29-1	16	125	16	23.2	12	16.5	-	1.75		
	GVNER/L16-29-2	16	125	16	23.2	12	16.5	-	2.75		
	GVNER/L20-29-1	20	125	20	20.9	8	20.5	-	1.75		
	GVNER/L20-29-2	20	125	20	20.9	8	20.5	-	2.75		
	GVNER/L25-29-1	25	150	25	18.0	3	25.5	-	1.75		
	GVNER/L25-29-2	25	150	25	18.0	3	25.5	-	2.75		





Right hand shown


Close to Shoulder External Toolholders 90°



GVN26

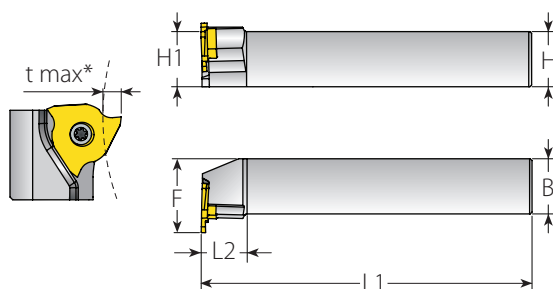


GVN29

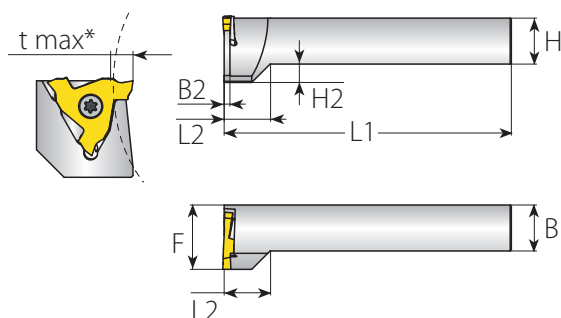


* See page 14 for t max and D max limitations.

									Spare Parts	
Insert Size	Ordering Code		Dimensions (mm)							
	RH/LH	H=B	L1	H1	L2	B2	H2	F	Insert Screw	Torx Key
26	GVNE90R/L20-26	20	125	20	20.0	-	-	28.5	SGM5	L20IP
	GVNE90R/L25-26	25	150	25	20.0	-	-	33.5		
29	GVNE90R/L20-29-1	20	125	20	20.2	1.75	8	28.0		
	GVNE90R/L20-29-2	20	125	20	20.2	2.75	8	28.0		
	GVNE90R/L25-29-1	25	150	25	25.0	1.75	3	33.0		
	GVNE90R/L25-29-2	25	150	25	25.0	2.75	3	33.0		

For LH90° work applications use LH toolholder with RH insert and vice versa.

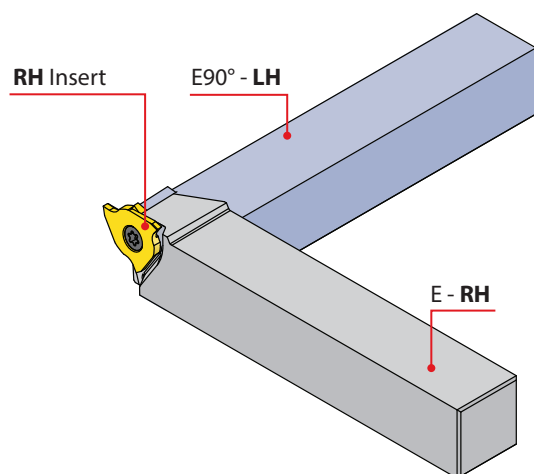


GVN26

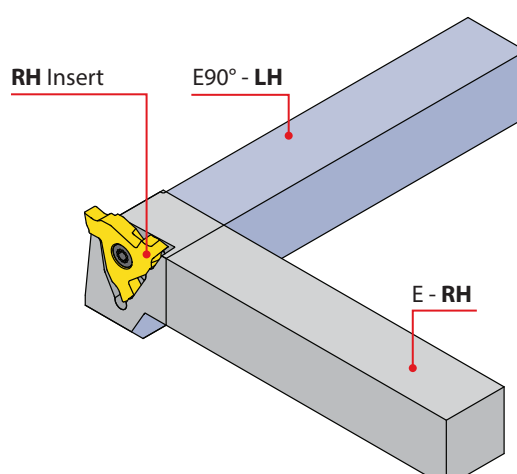


GV29 / GVN29

Close to Shoulder Internal Toolholders with Coolant

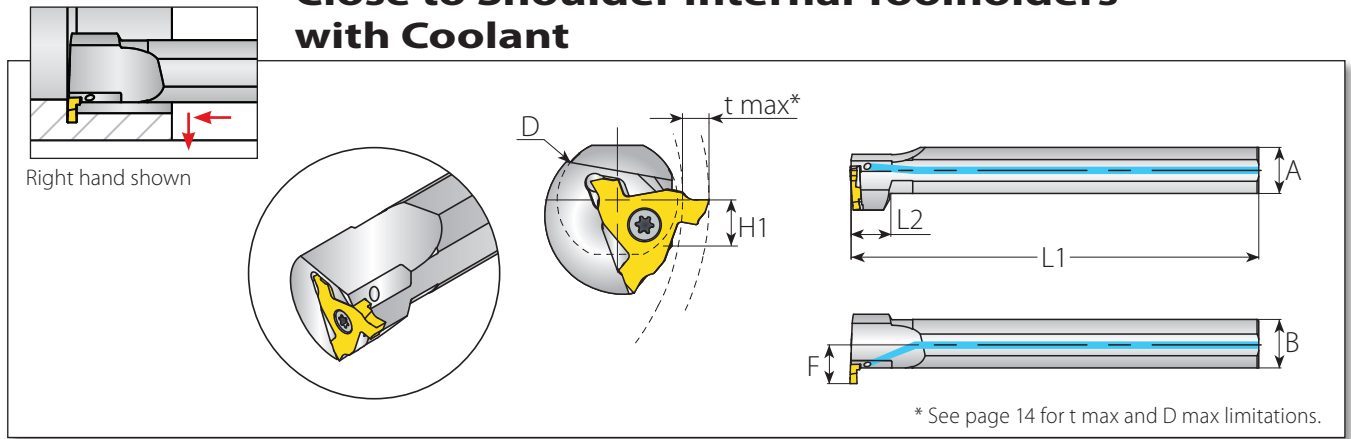


Insert Size	Ordering Code	Dimensions (mm)							Spare Parts	
		RH/LH	D	L1	L2	A	B	H1	F	
29	GVNIR/L25-29		25	200	19	22.6	23.8	11.3	19.0	Insert Screw
	GVNIR/L32-29		32	250	19	29.0	30.5	14.5	22.2	Torx Key




For **LH Internal** work applications use **LH toolholder** with **RH insert** and vice versa.

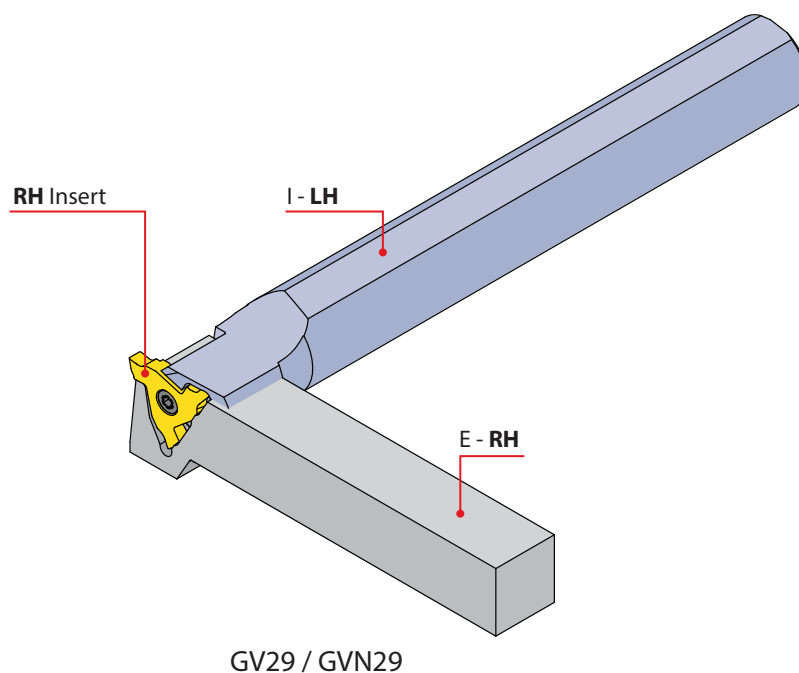

External Toolholders (GV29)



Right hand shown

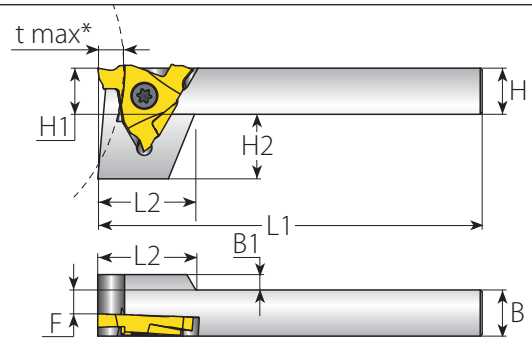


* See page 14 for t max and D max limitations.

										Spare Parts	
Insert Size	Ordering Code	Dimensions (mm)									
	RH/LH	H=B	L1	H1	L2	H2	F	B1	B2	Insert Screw	Torx Key
29	GVER/L12-29-1	12	100	12	25.5	16	7.2	4	1.75	SGM5	L20IP
	GVER/L12-29-2	12	100	12	25.5	16	6.2	4	2.75		
	GVER/L16-29-1	16	125	16	23.2	12	11.2	-	1.75		
	GVER/L16-29-2	16	125	16	23.2	12	10.2	-	2.75		
	GVER/L20-29-1	20	125	20	20.9	8	15.2	-	1.75		
	GVER/L20-29-2	20	125	20	20.9	8	14.2	-	2.75		
	GVER/L25-29-1	25	150	25	18	3	20.2	-	1.75		
	GVER/L25-29-2	25	150	25	18	3	19.2	-	2.75		




External Toolholders 90° (GV29)

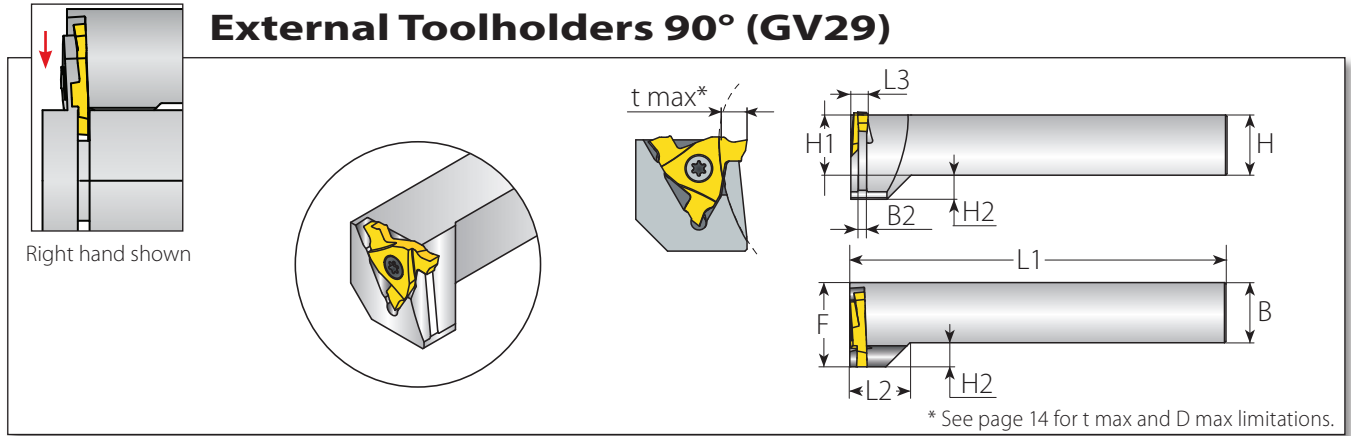

										Spare Parts	
Insert Size	Ordering Code		Dimensions (mm)								
	RH/LH	H=B	L1	H1	L2	H2	F	L3	B2	Insert Screw	Torx Key
29	GVE90R/L20-29-1	20	125	20	20.2	8	28	4.8	1.75	SGM5	L20IP
	GVE90R/L20-29-2	20	125	20	20.2	8	28	5.8	2.75		
	GVE90R/L25-29-1	25	150	25	25.2	8	33	4.8	1.75		
	GVE90R/L25-29-2	25	150	25	25.2	8	33		2.75		

Internal Toolholders (GV29) with Coolant

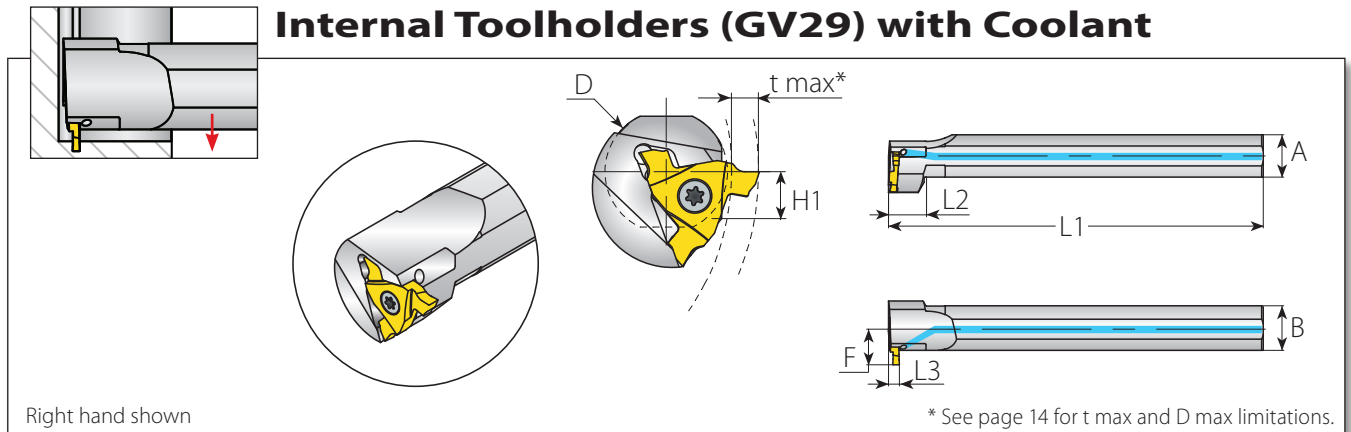


										Spare Parts	
Insert Size	Ordering Code		Dimensions (mm)								
	RH/LH	D	L1	L2	L3	A	B	H1	F	Insert Screw	Torx Key
29	GVIR25-29	25	200	19	5.8	22.6	23.8	11.3	19	SGM5	L20IP
	GVIR32-29	32	250	19	5.8	29	30.5	14.5	22.2		

D max Limitations


GVN26 External - Depth of Groove in Relation to Workpiece Dia.

D max is 150mm

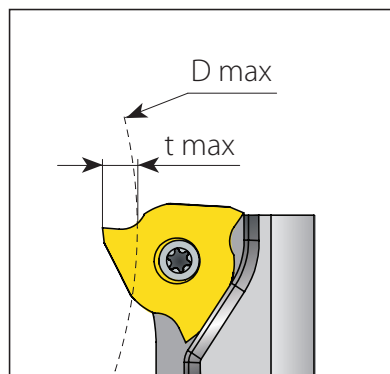


GV29 / GVN29 External - Depth of Groove in Relation to Workpiece Dia.

Dimensions (mm)	
t max	D max
0.5	1085.0
1	590.0
1.5	408.0
2	310.0
2.5	250.0
3	210.0
3.5	180.0
4	160.0
4.5	145.0
5	130.0
5.5	120.0
6	110.0
6.5	105.0

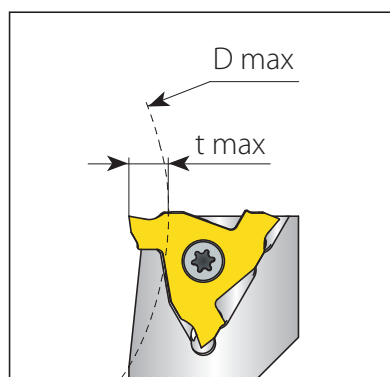

GV29 / GVN29 Internal - Depth of Groove in Relation to Bore Dia.

Dimensions (mm)	
t max	D min
0.5	41.8
1	42.3
1.5	42.8
2	43.5
2.5	44.2
3	45.1
3.5	46.1
4.0	47.2
4.5	48.3
5.0	49.9
5.5	54.2
6.0	73.5
6.5	104.5

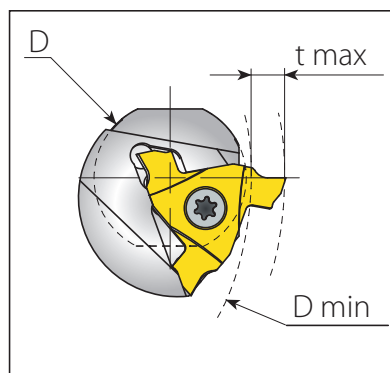

Groovical Technical Data

Recommended Grades and Cutting Data

Material Group	Vargus No.	Material		Hardness Brinell HB	Vc [m/min]
					Coated
					VKX
P Steel	1	Unalloyed Steel	Low Carbon (C=0.1-0.25%)	125	140-200
	2		Medium Carbon (C=0.25-0.55%)	150	120-180
	3		High Carbon (C=0.55-0.85%)	170	110-180
	4	Low Alloy Steel (alloying elements ≤5%)	Non Hardened	180	100-155
	5		Hardened	275	110-180
	6		Hardened	350	80-135
	7	High Alloy Steel (alloying elements >5%)	Annealed	200	70-115
	8		Hardened	325	50-100
	9	Cast Steel	Low Alloy (alloying elements <5%)	200	30-50
	10		High Alloy (alloying elements >5%)	225	20-40
M Stainless Steel	11	Stainless Steel Ferritic	Non Hardened	200	70-120
	12		Hardened	330	60-95
	13	Stainless Steel Austenitic	Austenitic	180	70-120
	14		Super Austenitic	200	40-90
	15	Stainless Steel Cast Ferritic	Non Hardened	200	80-110
	16		Hardened	330	65-110
	17	Stainless Steel Cast Austenitic	Austenitic	200	85-100
	18		Hardened	330	60-100
K Cast Iron	28	Malleable Cast Iron	Ferritic (short chips)	130	70-120
	29		Pearlitic (long chips)	230	70-120
	30	Grey Cast Iron	Low Tensile Strength	180	70-120
	31		High Tensile Strength	260	60-100
	32	Nodular Sg Iron	Ferritic	160	50-80
	33		Pearlitic	260	60-90
N_(K) Non-Ferrous Metals	34	Aluminium Alloys Wrought	Non Aging	60	100-240
	35		Aged	100	80-170
	36	Aluminium Alloys	Cast	75	100-150
	37		Cast & Aged	90	80-120
	38	Aluminium Alloys	Cast Si 13-22%	130	100-150
	39	Copper and Copper Alloys	Brass	90	80-200
	40		Bronze And Non Leaded Copper	100	80-200
S_(M) Heat Resistant Material	19	High Temperature Alloys	Annealed (iron based)	200	45-60
	20		Aged (iron based)	280	35-50
	21		Annealed (nickel or cobalt based)	250	20-30
	22		Aged (nickel or cobalt based)	350	15-25
	23	Titanium Alloys	Pure 99.5 Ti	400Rm	140-170
	24		α+β Alloys	1050Rm	50-70
H_(K) Hardened Material	25	Extra Hard Steel	Hardened & Tempered	45-50HRc	45-60
	26			51-55HRc	40-50

For **VTX Grade**, increase speed by 20%.

The maximum recommended **feed rate** is one-tenth of the insert width (W).

The minimum recommended **depth of cut** is twice the corner radius (r).

GrooVical
Precise Grooving
& Turning Applications



GROOVEX
Innovative Grooving & Turning Solutions